




Padlock

Controlled Access. Any Environment. No Batteries.

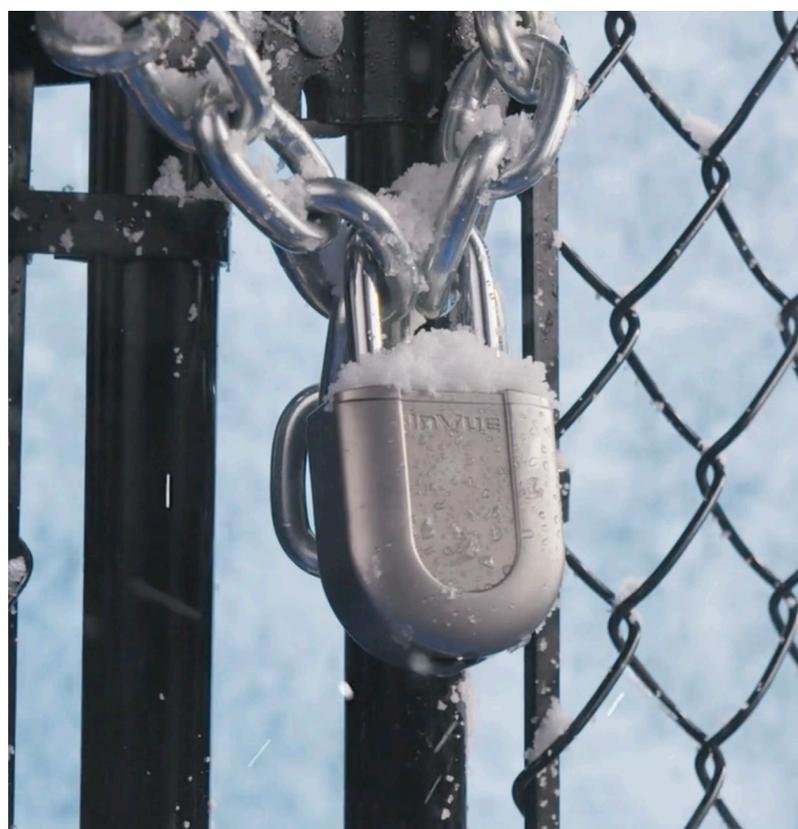

CONTROLLED ACCESS

Zone permissions and audit user interactions with the option for dual authentication.

ANY ENVIRONMENT

Industry-leading protection with an IP67 (waterproof) rating for any indoor or outdoor application.

NO BATTERIES

Power-transfer operation with OneKEY eliminates the need for batteries for lowest total cost of ownership.

EXCLUSIVELY DISTRIBUTED IN AUSTRALIA BY SABEL

Visit www.sabel.com.au • P 1300 551 662 • E sales@sabel.com.au

SABEL

Padlock empowers you to effectively manage, secure, and track access to your most important assets, areas, and spaces — inside or out.

FEATURES AND BENEFITS

- 1 OneKEY & LIVE Access compatible
- 2 Pick, shim, and bolt-cut resistant
- 3 Waterproof (IP67) when locked and latched
- 4 Operating temperature -30°C to +60°C (-22°F to +140°F)
- 5 Optional sleeve adds additional protection from sun, sand, snow, and impacts
- 6 Hardened steel body and boron shackle
- 7 Tested to ASTM F883 and EN16864 standards
- 8 Available in 9mm and 6.5 mm shackle diameters
- 9 Available in 25mm, 50mm and 100mm shackle heights
- 10 Anti-cut cover option available




Applications and Uses

Padlock can be instantly added to indoor or outdoor applications such as doors, cages, cabinets, storage, utility equipment and more.



USE ON INDOOR OR OUTDOOR APPLICATIONS

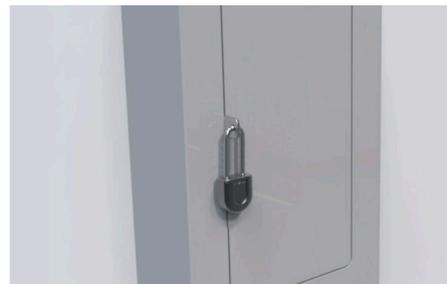

PROTECT CRITICAL EQUIPMENT



SECURE OUTDOOR STORAGE AND BUSINESS MATERIALS



FOR BACKROOM INVENTORY



TETHER SECURITY FOR LOW-VISIBILITY APPLICATIONS



LOCKERS FOR DAILY OPERATIONS

©2025 InVue Security Products. No endorsement of InVue products has been made by any of the manufacturers of the products shown. Product is sold pursuant to InVue's warranty which can be found at invue.com/warranty.

Part of ASSA ABLOY Group

EXCLUSIVELY DISTRIBUTED IN AUSTRALIA BY SABEL

Visit www.sabel.com.au • P 1300 551 662 • E sales@sabel.com.au

SABEL

Ordering Information

| ORDER CODE | DESCRIPTION |
|-----------------|---|
| PL60209-025 | Padlock, 9mm dia x 25mm (1in) shackle height |
| PL60209-050 | Padlock, 9mm dia x 50mm (2in) shackle height |
| PL60209-100 | Padlock, 9mm dia x 100mm (4in) shackle height |
| PL60206-025 | Padlock, 6.5mm dia x 25mm (1in) shackle height |
| PL60206-050 | Padlock, 6.5mm dia x 50mm (2in) shackle height |
| PL60206-100 | Padlock, 6.5mm dia x 100mm (4in) shackle height |
| PL60200-WSC | Weather Sleeve Cover |
| PL60209-025-ACC | Padlock, 9mm dia x 25mm (1in) shackle height, w/ anti-cut top (shrouded option) |
| PL60209-ACW | Weather sleeve cover (For PL60209-025-ACC) |

Product Specifications

| SPECIFICATIONS | PL60206-XXX | PL60209-XXX | PL60209-XXX-ACC |
|--|--|--|---|
| Weight | 1.5lbs | 1.5lbs | 1.5lbs |
| Shackle Diameter | 6.35 (1/4in) | 9mm (5/16 in) | 9mm (5/16 in) |
| Construction [Body] | Hardened Stainless Steel | Hardened Stainless Steel | Hardened Stainless Steel |
| Construction [Shackle] | Hardened Boron Alloy | Hardened Boron Alloy | Hardened Boron Alloy |
| Protected Shackle | Not Applicable | Not Applicable | ✓ |
| Operating Temperatures | -30°C to 60°C (-22°F to 140°F) | -30°C to 60°C (-22°F to 140°F) | -30°C to 60°C (-22°F to 140°F) |
| Battery | None | None | None |
| Dimensions | 69 x 60 x 32 mm (2.7 x 2.4 x 1.3 in) | 69 x 60 x 32 mm (2.7 x 2.4 x 1.3 in) | 69 x 60 x 32 mm (2.7 x 2.4 x 1.3 in) |
| Shackle Lengths | 25 / 50 / 100 mm (1.0 / 2.0 / 4.0 in) | 25 / 50 / 100 mm (1.0 / 2.0 / 4.0 in) | 25 mm (1.0 in) |
| User Replaceable Shackle | ✓ | ✓ | ✓ |
| Protective Cover | ✓ | ✓ | ✓ |
| Time Stamped Access Audit Trail * | ✓ | ✓ | ✓ |
| Grant/Revoke Access by User or Padlock * | ✓ | ✓ | ✓ |
| Dual Authentication Option ** | ✓ | ✓ | ✓ |

* With InVue Live Access Software

** Requires 2 authorized users to unlock

Testing Information

| STANDARD | TEST | DESCRIPTION | PL60206-XXX | PL60209-XXX | PL60209-XXX-ACC |
|---------------------------|------------------------------|---|-------------------------------|-------------------------------|-------------------------------|
| EN16864 | Life Cycle | Open/Close cycles @ Operating Extremes | Grade 1 | Grade 1 | Grade 1 |
| | Corrosion | Resistant to Salt Fog | Grade 3 | Grade 3 | Grade 3 |
| | Drilling Resistance | High Speed drill bit resistant | Grade 4 | Grade 4 | Grade 4 |
| | Shackle Twist | Torque applied to shackle | Grade 2 | Grade 3 | Grade 3 |
| | Shackle Sawing | Hack Saw Blade on Shackle | Grade 6 | Grade 6 | Grade 6 |
| | Low Temp Impact | Impact Resistance on Lock Body | Grade 4 | Grade 4 | Grade 4 |
| | ESD Attack | Electrostatic Discharge Resistance | Grade 4 | Grade 4 | Grade 4 |
| | Magnet Attack | Resistance to Magnetic Field | Grade 4 | Grade 4 | Grade 4 |
| EN16864 [ASTM F883] | Shackle Pull | Resistance to pull force | Grade 3 [Grade 5] | Grade 4 [Grade 6] | Grade 4 [Grade 6] |
| | Shackle Cutting | Resistance to bolt cutters | Grade 3 [Grade 6] | Grade 4 [Grade 6] | Grade 6 [N/A] |
| EN16864 Classification | | | 1 1 3 1 6 D 3 2 | 1 1 3 1 6 D 3 3 | 1 1 3 1 6 D 3 3 |
| MIL810H | Drop | Simulated chest height drop | ✓ | ✓ | ✓ |
| IEC60068 | Tumble | Simulated knee height drop | ✓ | ✓ | ✓ |
| IEC60569 | IP X7 Water Submersion | Submersion when locked & latched | ✓ | ✓ | ✓ |
| | IP X2 Light Rain | Rain proof when unlocked and unlatched | ✓ | ✓ | ✓ |
| | IP 6X Dust Tight | Dust tight when locked and latched | ✓ | ✓ | ✓ |
| | IP 4x 1mm particle protected | Protected from particle ingress when unlocked and unlatched | ✓ | ✓ | ✓ |